


**ECM** NO<sub>x</sub>/NH<sub>3</sub> 5241

# NO<sub>x</sub> and NH<sub>3</sub> Analyzer

Measure NO<sub>x</sub>, NO, NO<sub>2</sub>, NH<sub>3</sub>, O<sub>2</sub>, Lambda, AFR, and  $\phi$

For Engine-Out  
and Tailpipe  
Measurement  
Applications

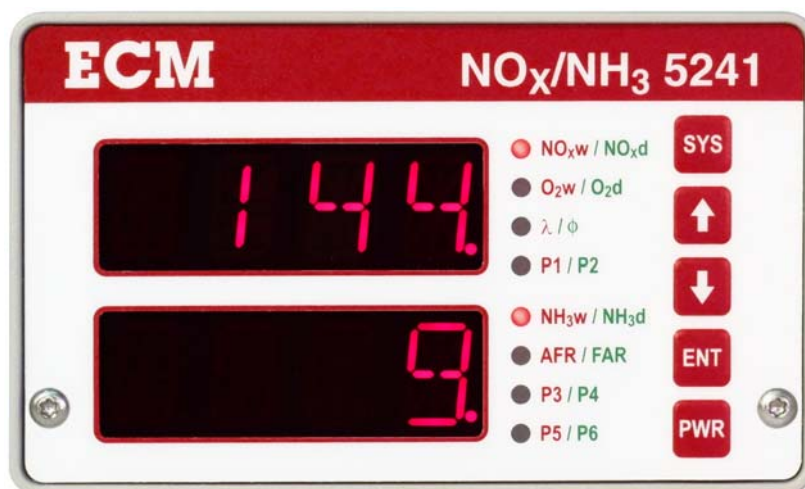

→ Analog Out

↔ CAN


↔ USB

Actual Size

For Diesel and Lean-Burn Engines



Uses Direct-Insertion Ceramic Sensors

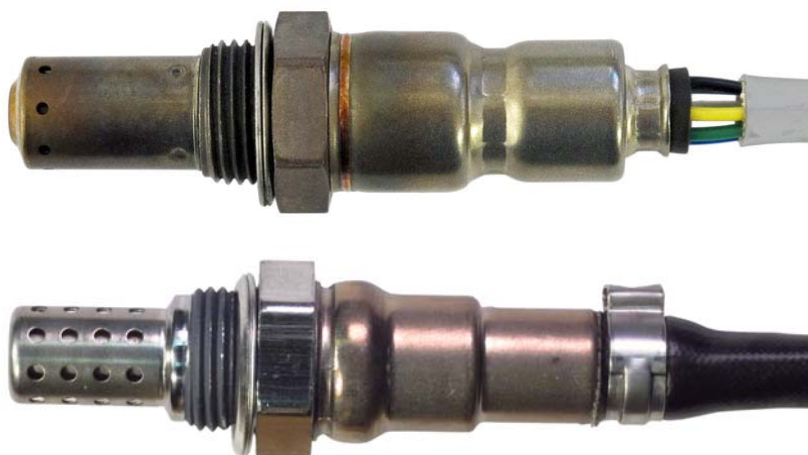

ECM's NO<sub>x</sub>/NH<sub>3</sub> 5241 Analyzer is a remarkable instrument that combines the measurement of NO<sub>x</sub>, NO, NO<sub>2</sub>, NH<sub>3</sub>, O<sub>2</sub>, and Lambda into a single, compact package. Designed for use with diesel and lean-burn engines, the Model 5241 is useful for both engine and aftertreatment (ex. SCR) development. Engine output (NO, NO<sub>2</sub>, O<sub>2</sub>), dosing (NH<sub>3</sub>), and tailpipe output (NO, NO<sub>2</sub>, NH<sub>3</sub>, O<sub>2</sub>) can be measured with the same instrument. Distances of up to 100 meters between the sensors and the analyzer are possible with no degradation in response time. The sensors have their calibration stored in a memory chip in the sensors' connectors. Calibration can be performed by the user (Zero, Span) and is written into the memory chip. This allows sensors to be recalibrated in a central location (or by ECM) and distributed to users, ensuring consistent results throughout a large test facility.

The NO<sub>x</sub>/NH<sub>3</sub> 5241 is programmable for all fuel types (specified by fuel H:C, O:C, N:C ratios, or H<sub>2</sub>). NO<sub>x</sub>, NO, NO<sub>2</sub>, NH<sub>3</sub>, O<sub>2</sub>, Lambda ( $\lambda$ ), AFR, Equivalence Ratio ( $\Phi$ ), and all sensor parameters including pumping currents, cell resistance, and sensor age factor are available for display and output. For improved accuracy with high exhaust pressures, a pressure compensation kit is available.

The NO<sub>x</sub>/NH<sub>3</sub> 5241 is compact, yet easy to read, making it suitable for both dynamometer and in-vehicle applications. With six analog outputs, CAN, and USB communication, the NO<sub>x</sub>/NH<sub>3</sub> 5241 can be integrated into any data acquisition system. To simplify in-vehicle use, the NO<sub>x</sub>/NH<sub>3</sub> 5241 can be turned on and off with a signal from the vehicle's ignition switch. This feature along with the analyzer's CAN communication capability makes it possible to integrate the NO<sub>x</sub>/NH<sub>3</sub> 5241 into the loop of a real-time emissions control strategy.

Exhaust NO<sub>x</sub>, NO, NO<sub>2</sub>, NH<sub>3</sub>, and O<sub>2</sub> concentrations are of paramount importance to engine and aftertreatment developers and legislators. The NO<sub>x</sub>/NH<sub>3</sub> 5241 makes these difficult measurements with ease and is an indispensable tool for the development of modern engine systems.

## Specifications

<b>Ranges</b>	<b>NO<sub>x</sub></b>	0 to 5000 ppm (For $\lambda > 1$ only)
	<b>NO</b>	0 to 5000 ppm (For $\lambda > 1$ only)
	<b>NO<sub>2</sub></b>	0 to 5000 ppm (For $\lambda > 1$ only)
	<b>NH<sub>3</sub></b>	0 to 2000 ppm (For $\lambda > 1$ only)
	<b>O<sub>2</sub></b>	0 to 25%
	<b>Lambda(<math>\lambda</math>)</b>	0.4 to 25
	<b>AFR</b>	6 to 364
	<b><math>\Phi</math></b>	0.04 to 2.5
	<b>NO<sub>x</sub></b>	$< \pm 5$ ppm (0 to 1000 ppm), $< \pm 1\%$ (elsewhere)
	<b>NO</b>	$< \pm 5$ ppm (0 to 1000 ppm), $< \pm 1\%$ (elsewhere)
<b>Accuracies</b>	<b>NO<sub>2</sub></b>	$< \pm 5$ ppm (0 to 1000 ppm), $< \pm 1\%$ (elsewhere)
	<b>NH<sub>3</sub></b>	$< \pm 5$ ppm (0 to 1000 ppm), $< \pm 1\%$ (elsewhere)
	<b>%O<sub>2</sub></b>	$\pm 0.2$ (absolute)
	<b><math>\lambda</math>, AFR, <math>\Phi</math></b>	$\pm 0.8\%$ (at stoichiometric), $\pm 1.8$ (average, elsewhere)
	<b>Pressure</b>	$\pm 5.2$ kPa ( $\pm 0.75$ psia)
<b>Response Times</b>	Less than 1 s (NO <sub>x</sub> , NO, NO <sub>2</sub> , NH <sub>3</sub> ). Less than 150 ms (O <sub>2</sub> , $\lambda$ , AFR, $\Phi$ )	
<b>Fuels Supported</b>	Programmable H:C, O:C, N:C ratios, and H <sub>2</sub>	
<b>Analog Outputs</b>	6 channels, 0 to 5V linearized and programmable for NO <sub>x</sub> , NO, NO <sub>2</sub> , NH <sub>3</sub> , O <sub>2</sub> , $\lambda$ , AFR, $\Phi$ , etc.	
<b>CAN, USB</b>	Programmable communication protocol including data transfer	
<b>Power</b>	11 to 28 VDC, AC/DC (optional)	
<b>Sensors</b>	18mm x 1.5mm thread	
<b>Size and Cable</b>	105mm (W) x 64mm (H) x 165mm (D), 4m cable (std), up to 100m (optional)	
<b>Operating Temp.</b>	-40 to +85°C electronics, 950°C (maximum continuous) sensors	
<b>Options</b>	Pressure Compensation Kit, Rackmount Kit (holds up to 4 analyzers/8 channels), Calibrator, NO <sub>x</sub> /NH <sub>3</sub> Sensor Simulator, Extension Cables, AC/DC Power Supply	

**ECM** ENGINE CONTROL  
AND MONITORING

Los Altos • CA • 94023-0040 • USA • Tel: (408) 734-3433 • Fax: (408) 734-3432 • [www.ecm-co.com](http://www.ecm-co.com)

Specifications subject to change without notice. Copyright © 2014 ECM. Printed in USA.

Techniques protected under patents issued and pending

ECM\_NH3\_5241\_09-15-14.pdf